


HOW TO UPDATE TO 3.0

- 1) Prepare a USB stick with the following file:
NAP_GLB_XX.bin




- 2) Switch off the machine, open the top panel, loosen the 3 screws and remove the command button wrapping to have access to the USB port

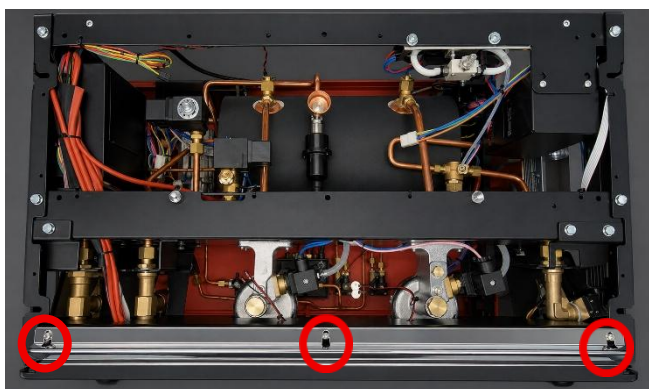


- 3) Insert the USB stick into the appropriate port and switch on the machine.




4) A loading screen will appear.
Do not turn off the machine during this process.
Once the update is complete, the machine will restart automatically.

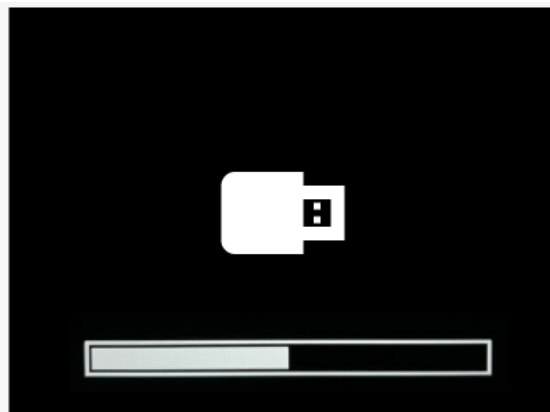

5) Switch off the machine and disconnect the USB stick.
Reassemble the command button wrapping and secure the top panel back into position.

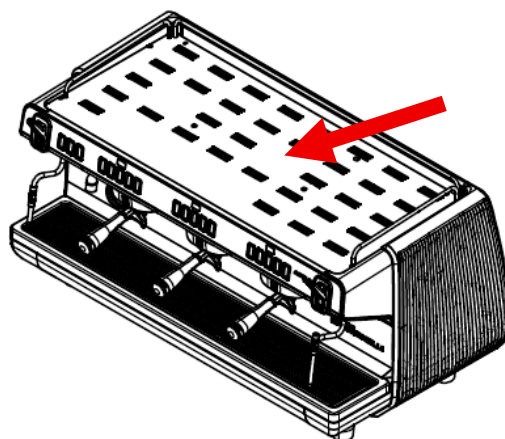

6) Switch on the machine, open the **menu**, select “Advanced” and enter the password

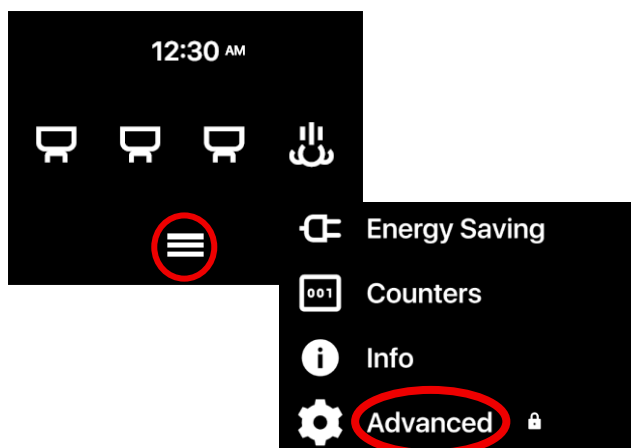

7) Select **"Reset"**, then **"Factory Settings"**. The password will be required, and the machine will be restored to its factory default settings.

